

QUBIK installation

careful prescriptions

MAIN CAUTION



All capacitive devices are calibrated after power ON.

It is mandatory don't keep in hand the device during calibration procedure.

At the end of the installation it is recommended to remove the KNX power supply from the main electrical cabinet for a few seconds to repeat the calibration.


[1] Remember to program Physical Address before to begin installation.

[2] Connect KNX cable.
Please, don't touch sensitive area.

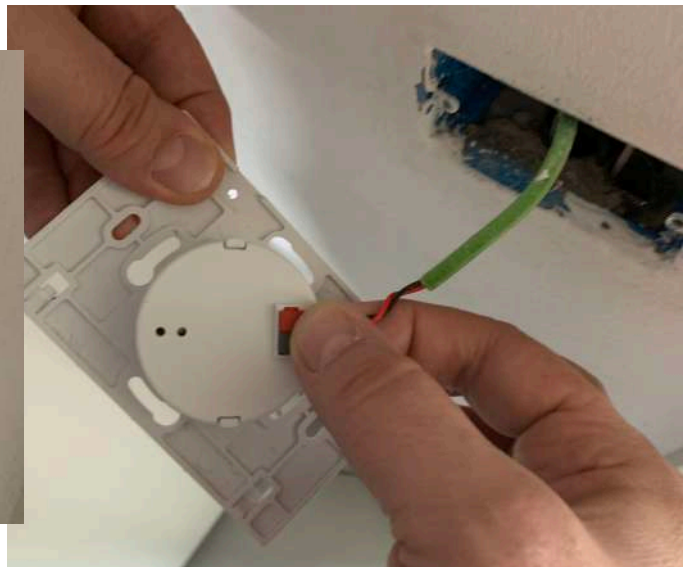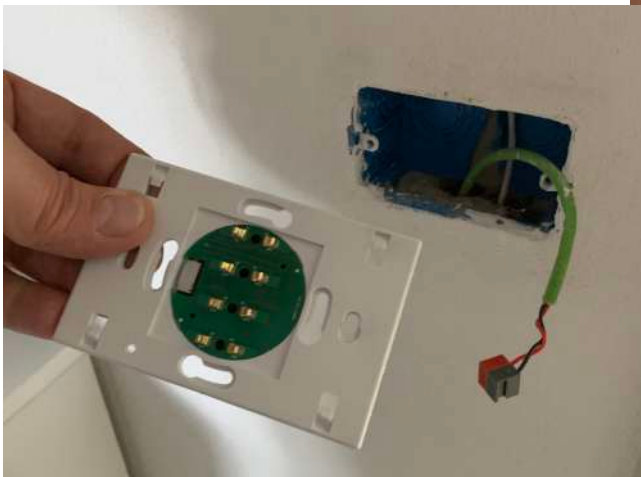


[3] Verify that keyboard is working well.

Touch gold spring to switch.

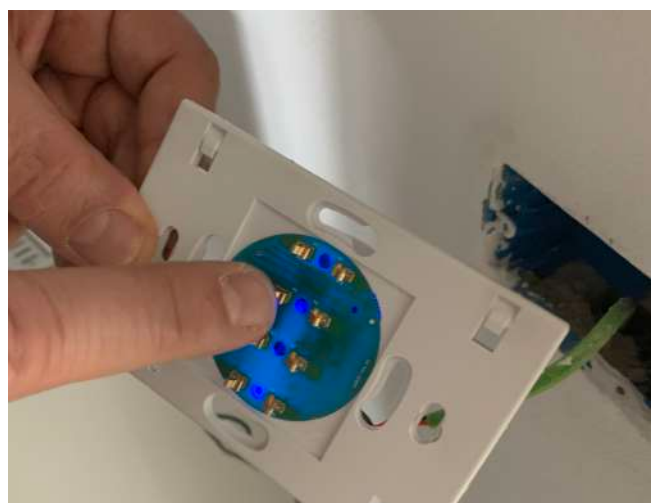

[4] Mount at wall the device.

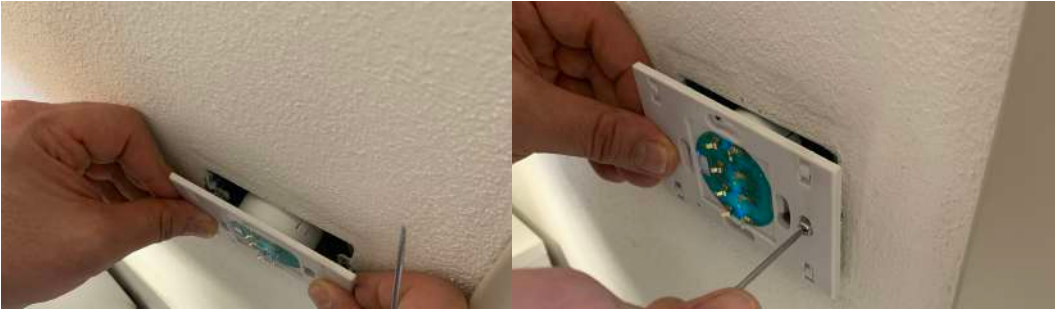

[5] Check all KNX functions before to install front panel.



If KNX works well without front panel it means that hardware is OK.

[6] Be careful to the thickness of the screw heads.

The screw heads can prevent the panel from being inserted correctly.



[7] If there is any doubt that the springs do not touch the sensitive area, you can pull them with your fingers to stretch.



[8] Now you can insert the Front Panel.



[9] remember to switch off KNX power from main electrical cabinet.

